


# Inverse Kinematics

This addresses the obvious question: what joint angles will place my end effector in a desired pose?

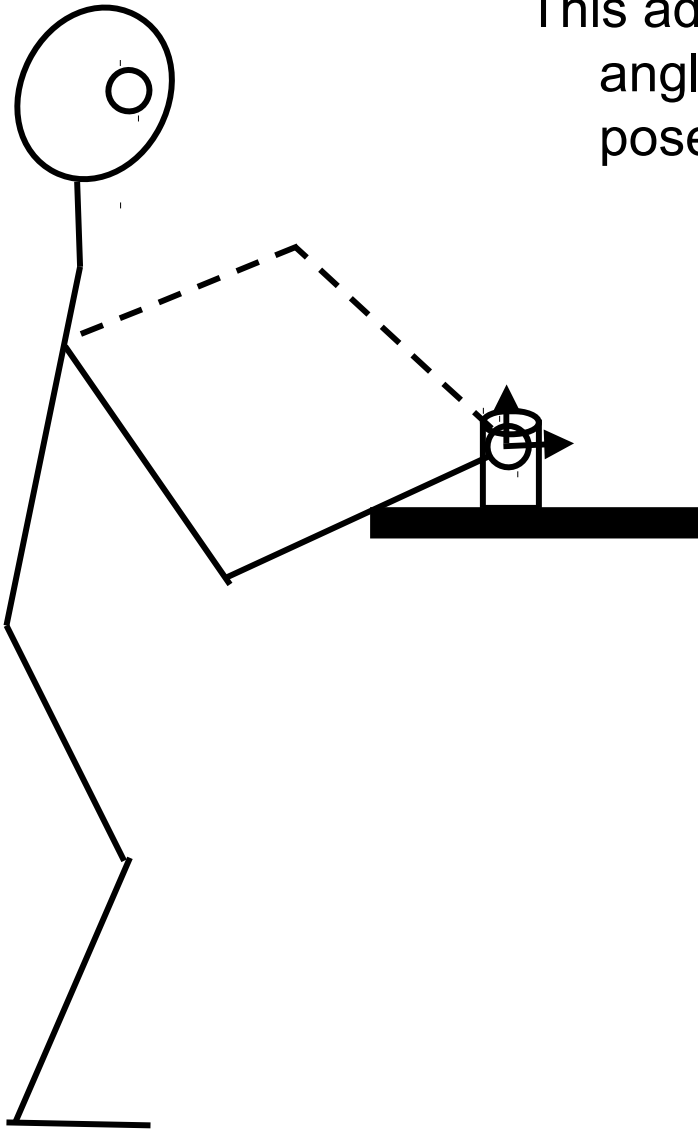

# Inverse kinematics

Closed form (analytical) solution: a sequence or set of equations that can be solved for the desired joint angles

- Potentially faster than an iterative solution
- A unique solution to all manipulator positions can be determined *a priori*.
  - Can guarantee “safe” joint configurations where the manipulator does not collide with the body.

Iterative (numerical) solution: numerical iteration toward a desired goal position (variation on Newton’s method)


- Easier to think about
- Better suited to incremental displacements and control.

# Inverse kinematics

## **There is no general analytical inverse kinematics solution**

- All analytical inverse kinematics solutions are specific to a robot or class of robots.
  - based on geometric intuition about the robot
- I'll give one example – there are many variations.

# Inverse kinematics

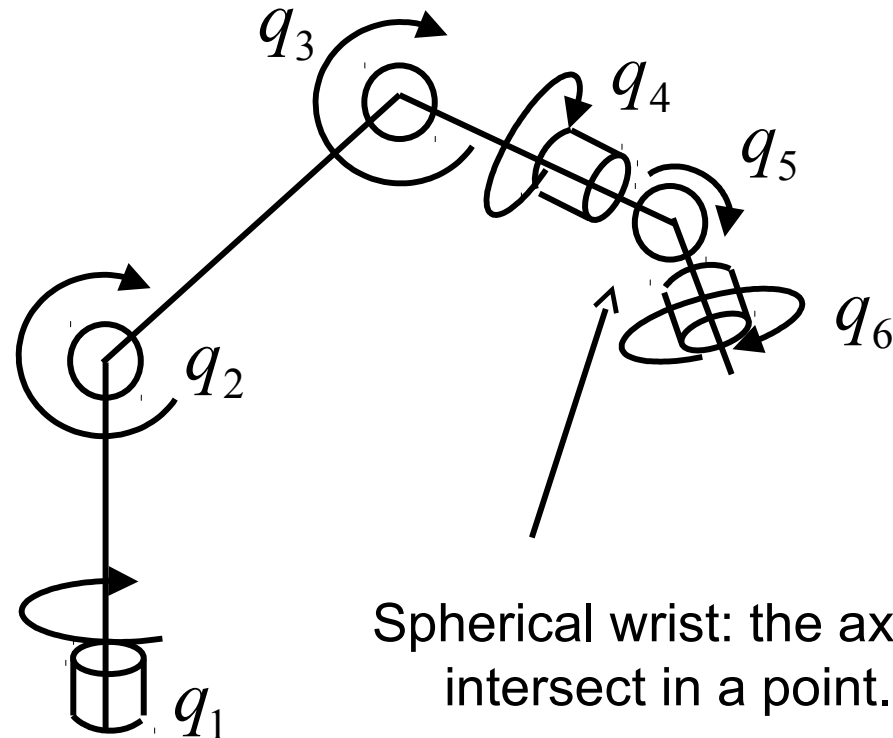

Spherical wrist: the axes of the last three joints intersect in a point.


Consider this 6-joint robot:

- this example is out of the book...

# Inverse kinematics

Problem:

- Given: desired transform, 
$$T_{eff} = \begin{bmatrix} R_{eff} & d_{eff} \\ 0 & 1 \end{bmatrix}$$
- Find: 
$$q = (q_1 \quad q_2 \quad q_3 \quad q_4 \quad \cdots \quad q_n)$$

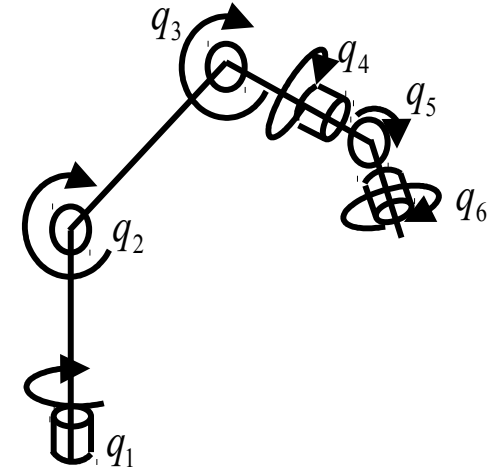


Note:

- The desired transform (pose) encodes six *degrees of freedom* (this info can be represented by six numbers)
  - Since we only have six joints at our disposal, there is no manifold of *redundant* solutions.
- For this manipulator, the problem can be decomposed into a position component (the first three joints) and an orientation component (the last three joints)
- The first three joints tell you what the position of the spherical wrist

# Example: Inverse kinematics

Solution:

- First, back out the position of the spherical wrist:

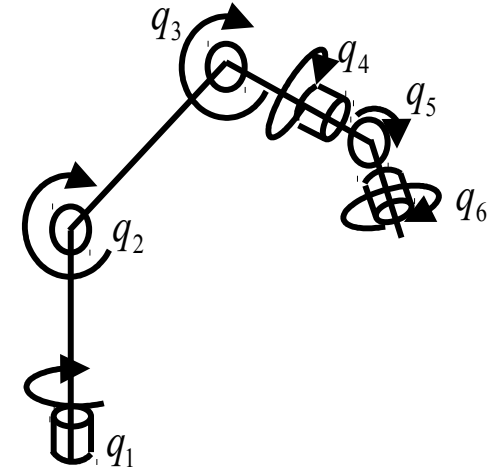

Since it's a spherical wrist, the last three joints can be thought of as rotating about a point.

- A constant transform exists that goes from the last wrist joint out to the end effector (sometimes this is called the “tool” transform):


$${}^{sw}T_{eff}$$

- Back out the position of the wrist:

$${}^bT_{sw} = {}^bT_{eff} {}^{sw}T_{eff}^{-1}$$

# Example: Inverse kinematics

- Next, solve for the first three joints

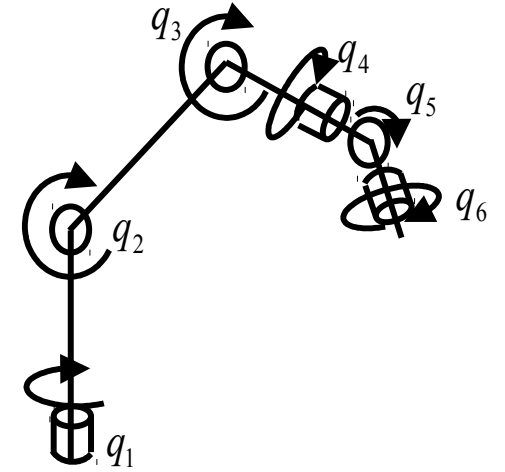


First, solve for  $q_1$  (look down from above)

Goal position in horizontal plane

$$q_1 = a \tan 2(x_g, y_g)$$


or

$$q_1 = a \tan 2(x_g, y_g) + \pi$$

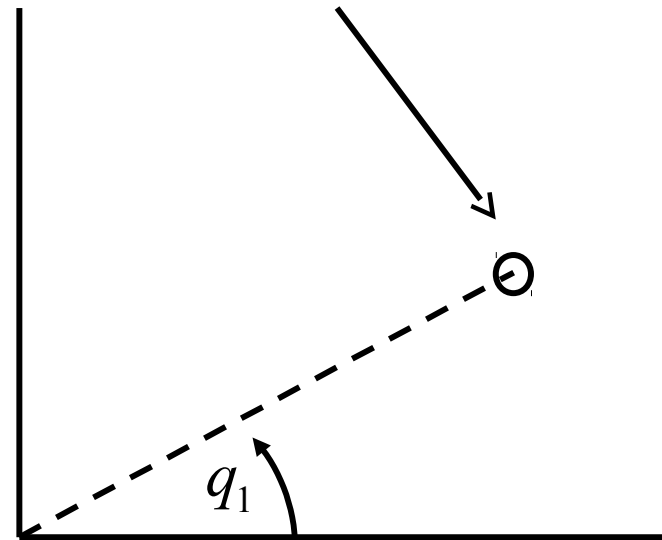

# Example: Inverse kinematics

Next, solve for  $q_3$  (look at the manipulator orthogonal to the plane of the first two links)

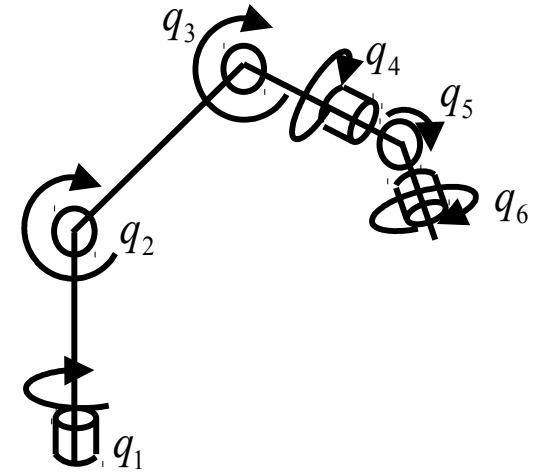


$$c^2 = a^2 + b^2 - 2ab \cos(\theta_c)$$

$$\cos(\theta_c) = -\frac{r_g^2 + (z_g - h)^2 - l_1^2 - l_2^2}{2l_1l_2} = -D$$

where  $r_g^2 = x_g^2 + y_g^2$

and  $h$  is the height of the first link


$$\tan(q_3) = \frac{\pm \sqrt{1 - D^2}}{D}$$

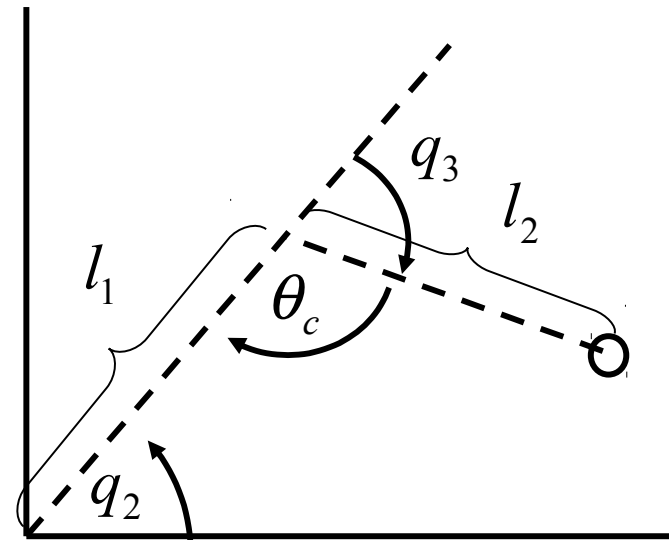



# Example: Inverse kinematics


Next, solve for  $q_2$  (continue to look at the manipulator orthogonal to the plane of the first two links)

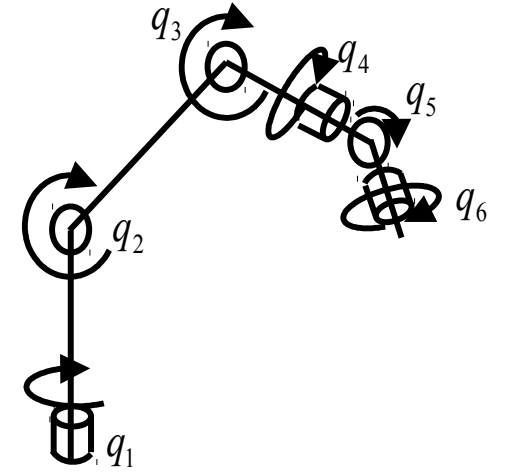

$$\tan(\theta) = \frac{z_g - h}{\sqrt{x_g^2 + y_g^2}}$$

$$\tan(\alpha) = \frac{l_2 s_3}{l_1 + l_2 c_3}$$


$$q_2 = \theta \pm \alpha$$

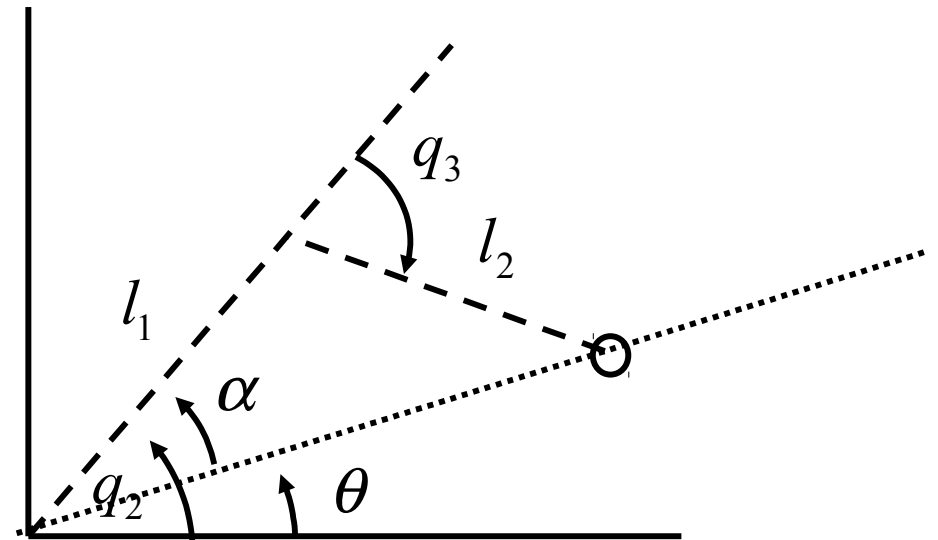

# Example: Inverse kinematics

Finally, the last three joints completely specify the orientation of the end effector.

- Note that the last three joints look just like ZYZ Euler angles
  - Determination of the joint angles is easy – just calculate the ZYZ Euler angles corresponding to the desired orientation.

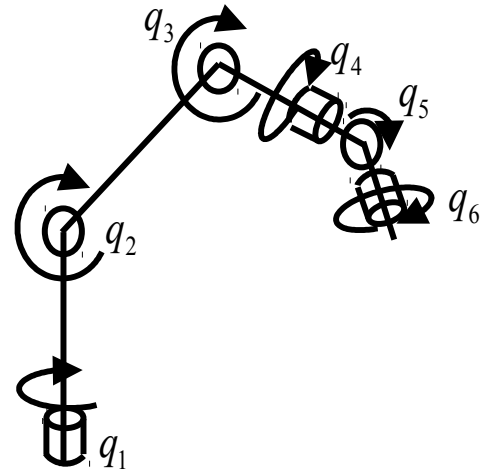

# Remember: ZYZ Euler Angles

$$R_{zyz}(\phi, \theta, \psi) = \begin{pmatrix} \cos \phi & -\sin \phi & 0 \\ \sin \phi & \cos \phi & 0 \\ 0 & 0 & 1 \end{pmatrix} \begin{pmatrix} \cos \theta & 0 & \sin \theta \\ 0 & 1 & 0 \\ -\sin \theta & 0 & \cos \theta \end{pmatrix} \begin{pmatrix} \cos \psi & -\sin \psi & 0 \\ \sin \psi & \cos \psi & 0 \\ 0 & 0 & 1 \end{pmatrix}$$

$$R_{zyz}(\phi, \theta, \psi) = \begin{pmatrix} c_\phi c_\theta c_\psi - s_\phi s_\psi & -c_\phi c_\theta s_\psi - s_\phi c_\psi & c_\phi s_\theta \\ s_\phi c_\theta c_\psi + c_\phi s_\psi & -s_\phi c_\theta s_\psi + c_\phi c_\psi & s_\phi s_\theta \\ -s_\theta c_\psi & s_\theta s_\psi & c_\theta \end{pmatrix}$$

$$\theta = \pm a \tan 2\left(\sqrt{1-r_{33}^2}, r_{33}\right)$$


$$\phi = a \tan 2(r_{23}, r_{13}) + k\pi$$

$$\psi = a \tan 2(r_{32}, r_{31})$$

# Inverse kinematics for a humanoid arm

You can do similar types of things for a humanoid (7-DOF) arm.

- Since this is a redundant arm, there are a manifold of solutions...

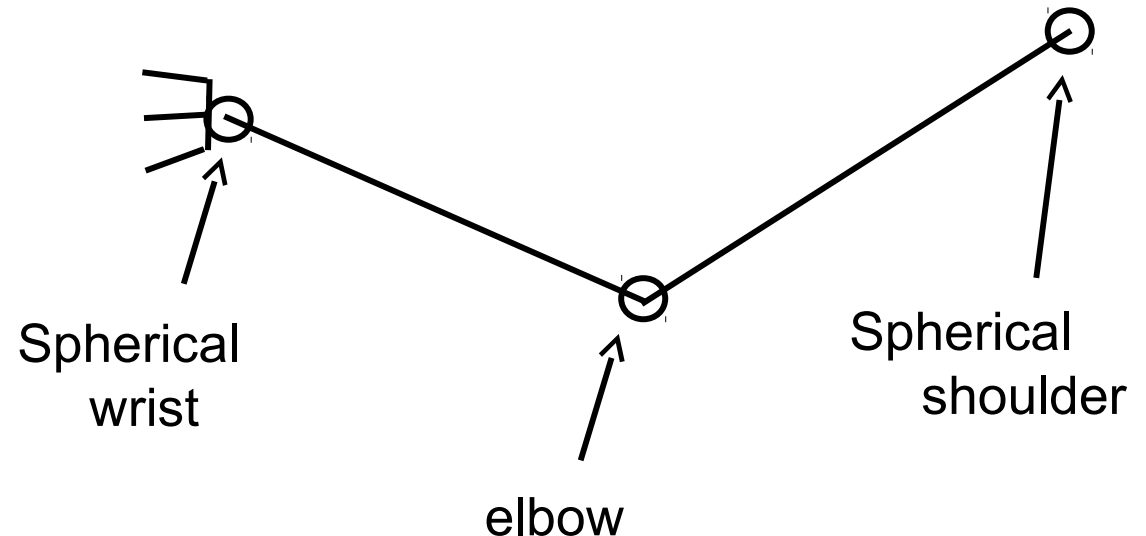

General strategy:

1. Solve for elbow angle
2. Solve for a set of shoulder angles that places the wrist in the right position (note that you have to choose an elbow orbit angle)
3. Solve for the wrist angles